

Features:

- Compliant with the EN54-24 standards fireproof ceiling speaker
- Built-in 100v/70v transformer for PA & VA system
- In-ceiling fast installation type loudspeaker
- 5" full range speaker unit
- Power taps 1.5W/3W/6W @100V
- With metal fire dome for fireproof applications
- Metal grille, metal baffle and fire dome in white
- Ceramic terminal, thermal fuse, fire dome and fire-resistant cable
- Fast installation by its three spring clips



EN54-24



Specifications:

Model	FCS-56CEN
Description	EN54-24 Ceiling Speaker
Power Taps @100V	6W/3W/1.5W
SPL(1W/1M)	91dB
Max. SPL (Rated W/1M)	98dB
Frequency Response	110-14.5KHz (-10dB)
Finish	Metal grille, metal baffle and fire dome in white
Speaker Driver	5" x 1 full range paper cone
Cutout Size	Ø 175mm
Dimensions	Ø 200 x 105mm
Weight	0.9Kg
Mounting	Spring-clip

Side View & Dimensions:

Installations

- Step 1: Remove the fire dome
- Step 2: Select the power tapping
- Step 3: Cable wire to ceramic connector through the fire dome
- Step 4: Lock the fire dome with front baffle by screws

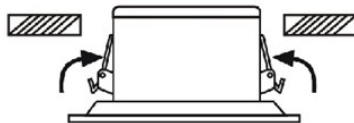

SPL VS Frequency Diagrams:

