

FOUR CHANNEL POWER AMPLIFIER WITH DSP & DANTE

DSP-4400 DSP-4300 DSP-4200




Description

The DSP-4400 is four channel Class-D power amplifiers with DSP & Dante network module for affordable audio amplification in both fixed and commercial audio installations. The DSP power amplifiers are rated power output at 4 x 400W @ 8 Ohm which provide an enormous flexibility for different size sound system applications. The DSP processor in combination with remote management software gives user friendly experience with intuitive functions overview for easy configuration. Acoustics can be optimized using noise gate, matrix mixer, PEQ, crossover, delay, compressor, Butterworth, Bessel, Linkwitz6~24. These settings can be custom configured using the English remote software by mini USB port on front panel. Loudspeaker protection is provided by an output power limiter whereby the maximum output power for every channel (in Watt) can be configured. Configuration is made simple with loudspeaker presets and full system configurations which can be selected from a library and uploaded to the amplifier. This ensures the best acoustical performance with a bullet-proof loudspeaker protection. The amplifier built-in 4 Input 4 Outputs DSP and 2 Input 2 Outputs Dante network card, which can ensure each input and output could be managed respectively, one RJ45 port is used for & Dante and one mini USB on front panel for DSP configure. There are four balanced line inputs by XLR. The amplifiers support 100V & 8 Ohm both commercial audio & professional audio applications, where an output selector could enable this function for dedicated sound system. The installation of this Dante network amplifier with DSP allows receiving and sending of low latency, high quality audio over a standard Ethernet network.

Feature:

- 4 x 400W Class-D stereo power amplifier at 8 Ohms (DSP-4400)
- Support 100V, 70V & 8 Ohm, 4 Ohm and Bridge modes
- Built-in DSP with EQ, gain control, crossover, delay, limiter, high-pass filter & low-cut filter
- 31 bands of input PEQ and 10 bands of output PEQ
- 30 pre sets of DSP (Digital Signal Processor)
- 2 Input 2 Outputs Dante network module and 4 In 4 Out matrix DSP module
- One Ethernet RJ-45 network connector for Dante configure
- One mini USB port on front panel for DSP configure
- 0dBu/6dBu sensitivity adjustment for each input
- Remote GPIO for failure outputs shall be customized and unavailable now
- 1U height 19" rack mount type power amplifier
- Balanced line input by XLR for four channels
- Complete short circuit, overload, high temp, clip and DC protection

Front & Rear Panel:

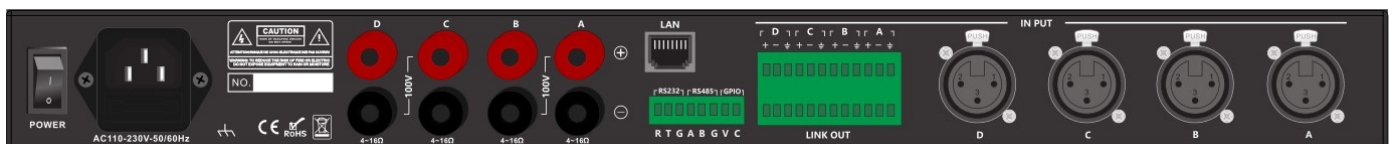

FOUR CHANNEL POWER AMPLIFIER WITH DSP & DANTE

DSP-4400 DSP-4300 DSP-4200

Specification:

Model	DSP-4400	DSP-4300	DSP-4200
Description	Four Channel Power Amplifier with DSP & Dante		
Rated Power Output 8 Ohm	4 x 400W	4 x 300W	4 x 200W
Rated Power Output 4 Ohm	4 x 800W	4 x 600W	4 x 400W
Rated Power Output 100V	2 x 400W	2 x 300W	2 x 200W
Bridge Output 8 Ohm	1000W	800W	600W
Speaker Output	4Ω, 8Ω & 100V, 70V, mono, free matrix, stereo, bridge		
DSP	EQ, gain control, crossover, delay, limiter, high-pass filter & low-cut filter, Butterworth, Bessel, Linkwitz6~24 Mini USB for configure, monitoring & control via fully manageable remote PC software		
Frequency Response	L/H Cut OFF 20Hz-20KHz (+1/-2dB) L/H Cut ON 70Hz-10KHz (+1/-3dB)		
Input	6dBu, Max. 16dBu (4.9V), balanced XLR by four channels		
THD	<0.1% (1KHz/-3dBv, 300W)		
S/N Ratio	6dBu: 94dB, 0dBu: 94dB		
Crosstalk	<-70dB		
Gain Control	6dBu: 30dB (29.5 times) , 0dBu: 36dB (31.1 times)		
Protection	DSP limiter, High temperature, DC, high frequency, short circuit, back EMF, peak current limiter, Back EMF, Surge current limiter, startup delay, power circuit breaker protection, power overvoltage , under voltage protection		
Display	240x240 pixel, IPS LCD colorful English Display		
Power Consumption	2000W	1600W	1000W
Power Supply	AC input switchable between 180~260V, 50-60Hz		
Dimension	484x300x44 mm		
Weight	5.4Kg		
DSP (4 IN 4 OUT) Specifications			
Input PEQ	31 PEQS		
Output PEQ	10 PEQS		
Crossover	Butterworth, Bessel, Linkwitz6~24		
Output Delay	Input Delay: 2 x 80ms / Output Delay: 4 x 20ms		
Output Compressor	Knee, Threshold, Attack, Ratio, Release		
Output Limiter	Threshold-90dBu~21dBu, release 1~2895ms		
DSP Presets	30 (one for factory preset)		
Control port	USB, RS485, RS232, GPIO (shall be customized and unavailable now)		
DSP Channel	4 Inputs & 4 Outputs		
Dante Module	2 Inputs & 2 Outputs		